

Terminal Block Plug In 20.130M/xx-E



5.00mm Pitch, 300V 10A, Rising Clamp Terminal Block, Black, Slot Head, Modular




Key Features

- 300V 10A
- UL94-V0
- PA66
- 5.00mm Pin Pitch
- Slot Head
- RoHS Compliant
- xx = Number of Poles (available 2~24 poles)
- Modular



Technical Data

Pitch	5.00mm
UL Rating	300V 10A
IEC Rating	250V 17.5A
Solder Pin	n/a
Wire Clamp	Copper Alloy / Nickel Plated
Wire Range	28~16 AWG (1.5mm ²)
PCB Hole Diameter	n/a
Stripping Length	4.5-5 mm
Screw	M2.5 Steel (Zinc Plated)
Screw Type	Slot Head
Screw Torque	0.4Nm (3.6lb/in)
Insulation Voltage	AC 2000V / 1 Min
Initial Contact Resistance	20mΩ
Insulation Resistance	500MΩ / DC500V
Temperature Range	-30 to +120°C
Max Soldering	+250°C for 5 sec

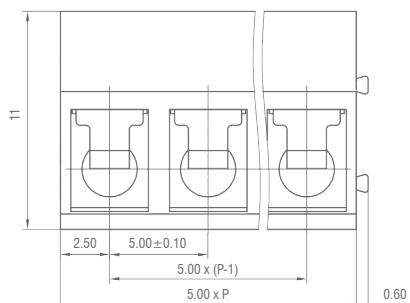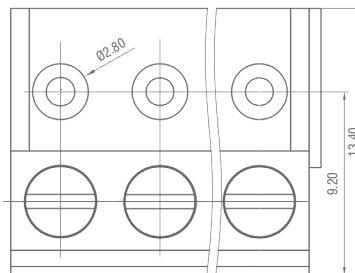

Dimensions shown in mm P = No of Poles

Supplied in black as standard

Other colour options and printing may be available depending upon quantity
Please contact IMO for further information